


Table Mount Elevator Instructions

(Part No. 04-739: For raising/positioning the Gemini Pro Rail Cutter above your media)


Note: For proper mounting and operation of the Table Mount Elevators on your existing work bench with your Gemini Pro Rail Cutter use this table for minimum work bench widths.

Gemini Pro size	Bench minimum width
40" (1.0m)	52" (1.3m)
60" (1.5m)	72" (1.8m)
80" (2.0m)	92" (2.3m)
100" (2.5m)	112" (2.5m)
120" (3.0m)	132" (3.3m)

Step #1: Securely mount either the Left or the Right Table Mount Elevator onto our work bench with the Lifting Bar facing the center of your work bench and the Lever Cutout facing the back.

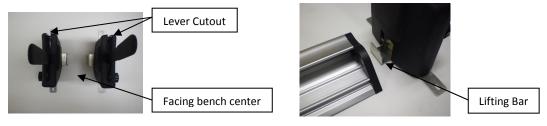

<u>Step #2:</u> Place your Gemini Pro Rail Cutter onto the Lifting Bar as shown. The Gemini Pro has a pocket specially machined into the bottom of the End Cap to fit over the Lifting Bar.

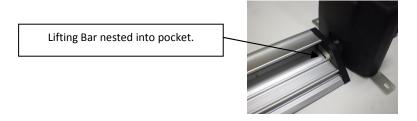

Step #3: Place the remaining Table Mount Elevator under the Gemini Pro Rail Cutter at the other end.

<u>Step #4:</u> Mark the two hole locations and securely mount the Table Mount Elevator to your work bench.

<u>Step #5:</u> Loosen the Locking Knobs and operate the Elevators to insure smooth movement up and down.

Note: Levers toward the back lowers the Lifting Bars and Gemini Pro. Lever toward the front lifts the Lifting Bars and Gemini Pro.





The Fletcher-Terry Company